


DTF



- ◆ Сверло трёхзубое общего применения
- ◆ Плоскостная заточка вершины

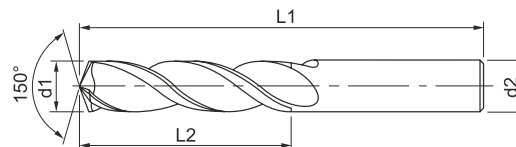

Сверло спиральное трёхперьевое

d1h7	L2	L1	d2h6	ОБОЗНАЧЕНИЕ
3,0	16	46	3,0	DTF-030/016C03S
3,2	18	49	4,0	DTF-032/018C04S
3,3	18	49	4,0	DTF-033/018C04S
3,5	20	52	4,0	DTF-035/020C04S
4,0	22	55	4,0	DTF-040/022C04S
4,2	22	55	5,0	DTF-042/022C05S
4,5	24	58	5,0	DTF-045/024C05S
5,0	26	62	5,0	DTF-050/026C05S
5,5	28	66	6,0	DTF-055/028C06S
6,0	28	66	6,0	DTF-060/028C06S
6,8	34	74	7,0	DTF-068/034C07S
7,0	34	74	7,0	DTF-070/034C07S
7,5	34	74	8,0	DTF-075/034C08S
8,0	37	79	8,0	DTF-080/037C08S
8,5	37	79	9,0	DTF-085/037C09S
9,0	40	84	9,0	DTF-090/040C09S
9,5	40	84	10,0	DTF-095/040C10S
10,0	43	89	10,0	DTF-100/043C10S
10,2	43	89	11,0	DTF-102/043C11S
11,0	47	95	11,0	DTF-110/047C11S
12,0	51	102	12,0	DTF-120/051C12S



Возможно изготовление инструмента по размерам заказчика и с другим видом износостойкого покрытия